CLASS OF WORK	ADDRESS	NUMBER OF CARDS	DATE	DESCRIPTION
2	320 ROMA NE	29/35	2/78	PLUMB

DIST

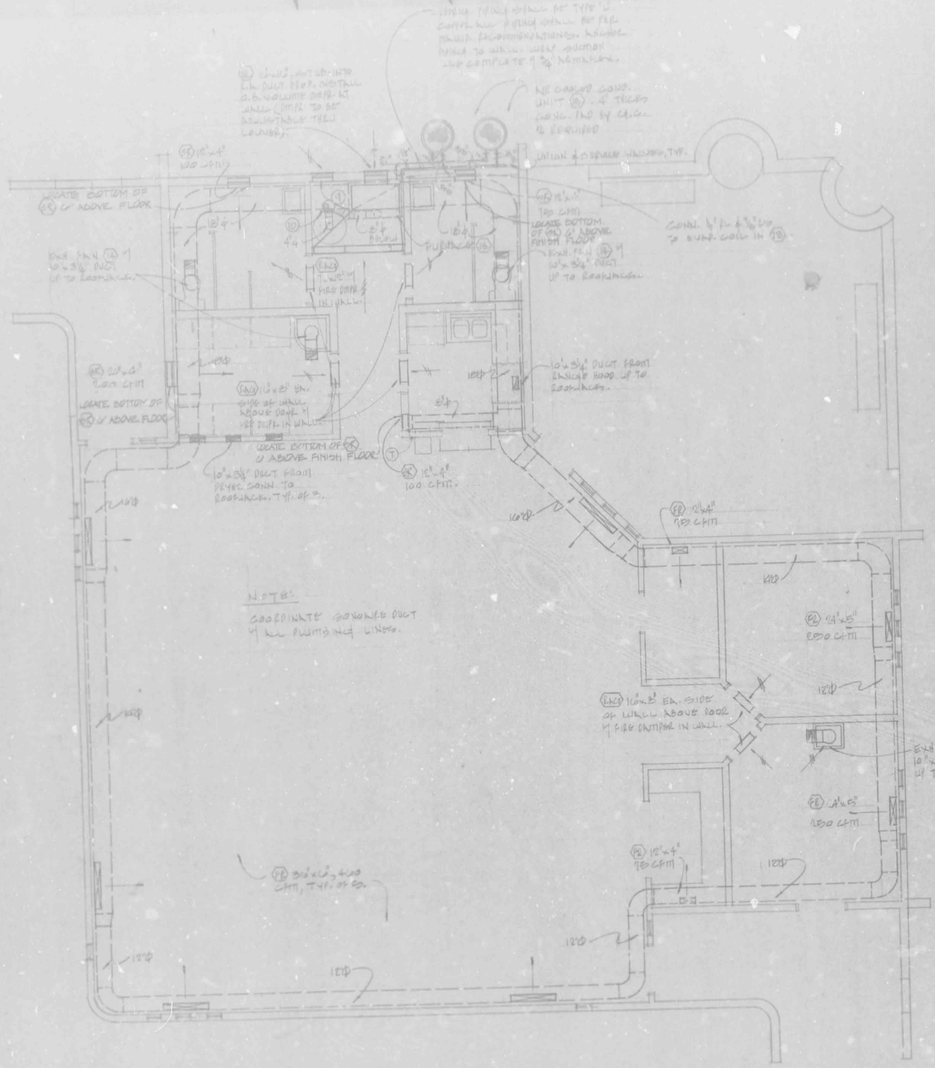

FLOOR PLAN — MECHANICAL

SCALE: ¼"=1'-0"

FLOOR PLAN — PLUMBING

SCALE: ¼"=1'-0"

NOTES:

1. See Utilities Plot Plan for continuation of Piping.
2. Piping drops in wall, size as shown.
3. 1" Gas thru wall in water-roof sleeve.
4. Connect ¾" Gas to Water Heater with gas cock, dirt leg, and flexible connector.
5. Connect 1" Gas to Furnace with gas cock, dirt leg and flexible connector.
6. Gas Meter and Regulator sized for 300 cfh connected load. Regulator shall have automatic low pressure cutoff, built-in internal high pressure relief. Install gas cock and union in rise from below grade to Regulator and 1" Capped Test Tee on low pressure piping. Configuration of piping shall be as required by Southern Union Gas Co.
7. 4"ø Flue, combine with Furnace Flue. See Mechanical Plan.
8. Route full size Relief Drain Line from T&P Relief Valve down low, thru wall and turn down outside.
9. 18"x 8" (VL) (1) at ceiling, and (1) 12" above finish floor for Combustion Air. Furnish and install adjustable baffles in each. Baffles to be adjustable thru Louvers.
10. 9"ø Type "B" Flue thru Roof.

CITY OF ALBUQUERQUE

The microimage of this document is certified to be an accurate copy of the original document as it appears in the files of the BUILDING AND INSPECTION DIVISION

Date ____ By ____ Asst. Chief, Clerk/Recordist

SHEET TITLE
COMMONS BLDG.
PLUMBING & MECHANICAL FLOOR PLANS

PROJECT
MARTINEZ TOWN HOUSING
TURLEY SUBDIVISION

MITCHELL & WRIGHT ARCHITECTS
2018 COAL PLACE SE
ALBUQUERQUE NEW MEXICO

34" 22" 17" 11" 8.5"